

## TAPERED CAYLOR LOOP TOOL

Tapered Caylor Loop fastenings can be made on the inside or on the outside of wirebound crates.



For joining 2 or more boxes or crates with tapered Caylor Loops


Part No. 199.28

### DIRECTIONS FOR USE

1. Lay blanks flat with similar sections adjacent. Thread tapered end of loop through regular cleat notches on boxes or between slats on crates. Cleats on boxes must be pre-notched. Square end of loop should be placed approximately 1-3/4" from cleat, then bent upright. Tapered end is wrapped around cleat.
2. Insert tool through upright end of loop, and engage other end of loop with pivot notch. Rotate tool 180°. Disengage and remove tool.
3. Reinsert tool in same manner between loop ends. Rotate 180° - Remove tool.
4. Properly fastened Tapered Caylor Loop.

Tapered Caylor Loop Tools may be obtained from manufacturers of wirebound boxes and from Stapling Machines Co., Rockaway, New Jersey.

Part No. 149.697 - 5-1/2"  
Part No. 149.698 - 5-3/4"  
Part No. 149.699 - 7-3/8"

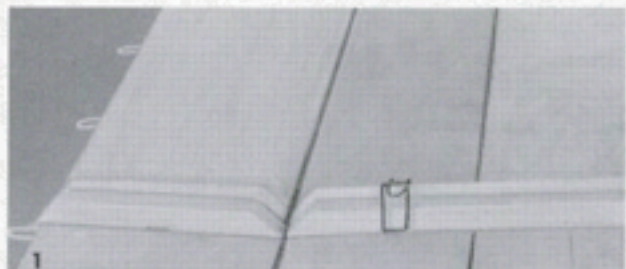

STAPLING MACHINES CO.

Division of Rockaway Corporation

21 Pine Street, Rockaway, New Jersey 07866